

## Calibration method for lambda probe in IC engine

**Patent number:** DE19545706  
**Publication date:** 1997-06-12  
**Inventor:** STAUFENBERG ULRICH (DE); OLEJNIK PETER (DE)  
**Applicant:** VDO SCHINDLING (DE)  
**Classification:**  
- **international:** F01N9/00  
- **european:** F02D41/14D5F2; F02D41/14D11; F02D41/24D4B  
**Application number:** DE19951045706 19951207  
**Priority number(s):** DE19951045706 19951207


Also published as:

US5771687 (A)

[Report a data error](#)

### Abstract of DE19545706

The method involves supplying the catalyst (2) with an over-rich fuel-air mixture and measuring the signal from the lambda probe (5,6) independently of other control signals. The probe signal is processed to form a correction value which is added to the probe signals generated with the engine in the operating state. A mean value formed from the measured maximum signal values is divided by a constant correspond. to the maximum signal value of a reference probe. The signal measurement value is measured at continuous intervals until a maximum time is reached.

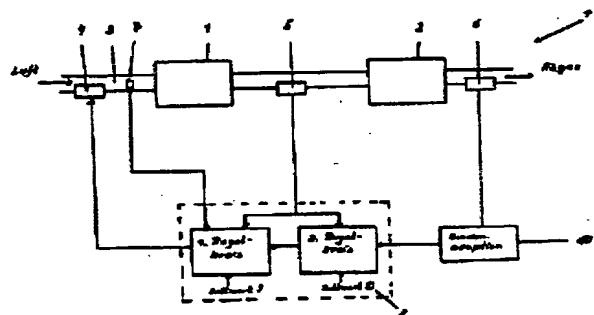

Data supplied from the **esp@cenet** database - Worldwide